

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 December 2001 (13.12.2001)


PCT

(10) International Publication Number
WO 01/94224 A1

- (51) International Patent Classification⁷: **B65D 33/16, B31B 1/90**
- (21) International Application Number: **PCT/US00/40121**
- (22) International Filing Date: **6 June 2000 (06.06.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (71) Applicant (for all designated States except US): **THE GLAD PRODUCTS COMPANY [US/US]; 1221 Broadway, Oakland, CA 94612 (US).**
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SAVICKI, Alan, F., Sr. [US/US]; 577 Beaconsfield Avenue, Naperville, IL 60565 (US).**
- (74) Agents: **AUGUSTYN, John, M. et al.; Leydig, Voit & Mayer, Ltd., Suite 4900, Two Prudential Plaza, 180 North Stetson, Chicago, IL 60601-6780 (US).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**

[Continued on next page]

(54) Title: **CONTAINER WITH CLOSURE DEVICE AND MULTIPLE SIDE SEALS**

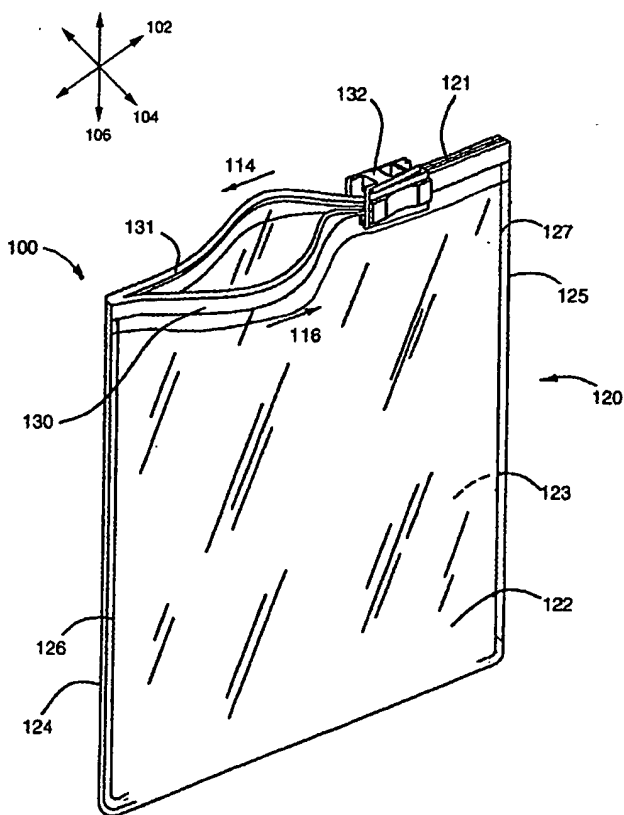

(57) Abstract: A container (100) includes a closure device (121). The closure device includes interlocking fastening strips (130, 131) and a slider (132) slidably disposed on the fastening strips for facilitating the occlusion and deocclusion of the fastening strips. The container includes first and second side seals (124, 125), and a third side seal (126). The third side seal (126) is provided for stronger sealing of the sidewalls (122, 123) and to further prevent forced separation of the sidewalls. The container may include fourth, fifth, and sixth side seals (227, 228, 229) for further facilitating the strength of the container. The side seals may be accomplished by heat sealing, ultrasonic sealing or adhesives that attach the sidewalls together.

WO 01/94224 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONTAINER WITH CLOSURE DEVICE AND MULTIPLE SIDE SEALS

5

FIELD OF THE INVENTION

The present invention relates generally to containers and, more particularly, to multiple side seals used with a closure device. The invention is particularly well suited
10 for use on flexible storage containers, including plastic bags.

BACKGROUND OF THE INVENTION

15

The use of closure devices for fastening storage containers, including plastic bags, is generally known. Furthermore, the manufacture of closure devices made of plastic materials is generally known to those skilled in the art, as demonstrated by the numerous patents in this area.

20

A particularly well-known use for closure devices is in connection with flexible storage containers, such as plastic bags. In some instances, the closure device and the associated container are formed from thermoplastic materials,
25 and the closure device and the sidewalls of the container are integrally formed by extrusion as a single piece. Alternatively, the closure device and sidewalls of the container may be formed as separate pieces and then connected by heat sealing or any other suitable connecting process. In
30 either event, such closure devices are particularly useful in providing a closure means for retaining matter within the bag.

Conventional closure devices typically utilize mating fastening strips or closure elements, which are used to selectively seal the bag. A slider may be provided for use in opening and closing the fastening strips. Some of these
5 sliders may include a separator which extends at least partially between the fastening strips. When the slider is moved in the appropriate direction, the separator divides the fastening strips and opens the bag.

10 Plastic bags may have a side seal on each side to hold the side walls together. One problem that has been overlooked by the prior art is the chance that the single side seal may not be able to fully hold the plastic bag together under certain instances. In particular, the
15 sidewalls of the plastic container may be forced apart from each other. This situation can happen in such cases where the bag may accidentally be dropped or if something of significant weight were to be dropped on top of the bag. This situation is particularly a problem when the bag is
20 storing a liquid and the liquid will leak out of the broken side seal. In addition, an unnoticed gap in the sidewalls would allow the bag to communicate air which could cause premature spoilage of the food. Furthermore, where the gap is noticed, the bag would have to be discarded.

25

SUMMARY OF THE INVENTION

According to the teachings of the present invention, the container includes sidewalls, side seals, and a closure
30 device. The side seals are used to securely fasten edges of the sidewalls together. The closure device includes interlocking fastening strips disposed along respective edge portions of the opposing sidewalls. The closure device may

also include a slider slidably disposed on the interlocking fastening strips for facilitating the occlusion and deocclusion of the fastening strips when moved towards first and second ends of the fastening strips.

5 The side seals may be created by heat sealing, ultrasonic sealing or an adhesive that attaches the sidewalls of the storage container together.

 These and other objects, features, and advantages of the present invention will become more readily apparent upon
10 reading the following detailed description of exemplified embodiments and upon reference to the accompanying drawings herein.

BRIEF DESCRIPTION OF THE DRAWINGS

15

 Fig. 1 is a perspective view of a container according to the present invention in the form of a plastic bag;

 Fig. 2 is a front view of the container in Fig. 1;

20

 Fig. 3 is a cross-sectional view taken along line 3-3 in Fig. 2;

 Fig. 4 is a front view of another embodiment of the
25 container;

 Fig. 5 is a cross-sectional view taken along line 5-5 in Fig. 4;

30 Fig. 6 is a cross-sectional view taken along line 6-6 in Fig. 4;

 Fig. 7 is a cross-sectional view of another embodiment;

Fig. 8 is a cross-sectional view of another embodiment;
and

5 Fig. 9 is a cross-sectional view of another embodiment.

DESCRIPTION OF THE EMBODIMENTS

10 Figs. 1-3 illustrate an embodiment of a container 100
in the form of a plastic bag 120 having a sealable closure
device 121.

The bag 120 includes a first sidewall 122 and a second
sidewall 123 joined at a first side seal 124 and a second
15 side seal 125 to define a compartment accessible through the
open top end but sealable by means of the closure device 121.
The first sidewall 122 and the second sidewall 123 are
additionally joined by a third and fourth side seals 126,
127. The third seal 126 is parallel to and in close
20 proximity to the first seal 124. Likewise, the fourth seal
127 is parallel to and in close proximity to the second seal
125. The third and fourth seals 126, 127 assist the first
and second seals 124, 125 in joining the first and second
sidewalls 122, 123.

25

The closure device 121 includes first and second
fastening strips 130, 131 and a slider 132. The fastening
strips 130, 131 and the slider 132 have a longitudinal X
axis 102, a transverse Y axis 104 and a vertical Z axis 106.
30 The transverse Y axis 104 is perpendicular to the
longitudinal X axis 102. The vertical Z axis 106 is
perpendicular to the longitudinal X axis 102 and the

vertical Z axis 106 is perpendicular to the transverse Y axis 104.

The first fastening strip 130 is attached to the first
5 sidewall 122 near the top end of the bag 120. The second
fastening strip 131 is attached to the second sidewall 123
near the top end of the bag 120. The fastening strips 130,
131 are located across from and substantially parallel to
each other and are configured to allow the fastening strips
10 130, 131 to be able to interlock. The slider 132 is mounted
onto the fastening strips 130, 131 so that the slider 132 is
restrained from being removed from the fastening strips 130,
131 but free to slide along the X axis 102. The slider 132
engages the fastening strips 130, 131 so that when the
15 slider 132 moves in an occlusion direction 114, the
fastening strips 130, 131 interlock and the bag 120 is
sealed, and when the slider 132 moves in a deocclusion
direction 116, the fastening strips 130, 131 separate and
the bag 120 is open.

20

Fig. 3 depicts a cross-section of the container in Fig.
1 and illustrates the first and third side seals 124, 126.
The first side seal 124 is disposed along the edge of the
sidewalls 122, 123. The third side seal 126 is disposed in
25 close proximity to the first side seal 124. The first and
third side seals are disposed parallel to the vertical Z
axis 106. There exists a small gap 128 between the first
and third side seals. The second and fourth side seals 125,
127 may have a similar construction.

30

Figs. 4-5 depict another embodiment of the container
200 and illustrate first side seal 224, second side seal
225, third side seal 226, fourth side seal 227, fifth side

seal 228 and sixth side seal 229. The third and fifth side seals 226, 228 are parallel to and in close proximity to the first side seal 224. Likewise, the fourth and sixth side seals 227, 229 are parallel to and in close proximity to the
5 second seal 225.

Fig. 5 depicts a partial cross-sectional view of the container in Fig. 4, along line 5-5 in Fig. 4, and illustrates the first, third, and fifth side seals 224, 226,
10 228. Referring to Figs. 5 and 6, the first side seal 224 is disposed along the edge of the sidewalls. The third and fifth side seals 226, 228 are disposed in close proximity to the first side seal 224. The first, third, and fifth side seals 224, 226, 228 are parallel to the vertical Z axis 106.
15 There exist small gaps 240, 242, 244, 246 between the side seals.

In other embodiments, the container may include four, five or more side seals next to the first side seal and/or
20 the second side seal.

The side seals may be manufactured by heat sealing, ultrasonic sealing, or adhesives that attach the sidewalls together. The additional side seals, such as, the third and
25 fourth seals, may be formed at the same time as that of the first and second seals. Alternatively, the additional side seals may be formed during another point in the manufacturing process. In addition, the additional side seals may be placed at varying distance from the first and
30 second seals as needed.

Figs. 6-9 illustrate interlocking fastening strips of different configurations.

As shown in Fig. 6, the fastening strips may be U-channel fastening strips as described in U.S. Patent 4,829,641. U-channel fastening strips include a first fastening strip 430 with a first closure element 436 and a second fastening strip 431 with a second closure element 434. The first closure element 436 engages the second closure element 434. The first fastening strip 430 may include a flange 463 disposed at the upper end of the first fastening strip 430 and a rib 467 disposed at the lower end of the first fastening strip 430. The first fastening strip 430 may include a flange portion 469. Likewise, the second fastening strip 431 may include a flange 453 disposed at the upper end of the second fastening strip 431 and a rib 457 disposed at the lower end of the second fastening strip 431. The second fastening strip 431 may include a flange portion 459. The side walls 422, 423 of the plastic bag 420 may be attached to the fastening strips 430, 431 by conventional manufacturing techniques.

20

The second closure element 434 includes a base portion 438 having a pair of spaced-apart parallelly disposed webs 440, 441, extending from the base portion 438. The base and the webs form a U-channel closure element. The webs 440, 441 include hook closure portions 442, 444 extending from the webs 440, 441 respectively, and facing towards each other. The hook closure portions 442, 444 include guide surfaces 446, 447 which serve to guide the hook closure portions 442, 444 for occluding with the hook closure portions 452, 454 of the first closure element 436.

30

The first closure element 436 includes a base portion 448 including a pair of spaced-apart, parallelly disposed webs

450, 451 extending from the base portion 448. The base and the webs form a U-channel closure element. The webs 450, 451 include hook closure portions 452, 454 extending from the webs 450, 451 respectively and facing away from each other.

5 The hook closure portions 452, 454 include guide surfaces 445, 455, which generally serve to guide the hook closure portions 452, 454 for occlusion with the hook closure portions 442, 444 of the second closure element 434. The guide surfaces 445, 455 may also have a rounded crown

10 surface.

The slider 432 includes a top portion 472. The top portion provides a separator 443 having a first end and a second end wherein the first end may be wider than the

15 second end. In addition, the separator 443 may be triangular in shape. When the slider is moved in the occlusion direction, the separator 443 deoccludes the fastening strips 430, 431 as shown in Fig. 6. Referring to Fig. 6, the closure elements 434, 436 are deoccluded and

20 specifically, the upper hook portions 442, 452 and the lower hook portions 444, 454 are deoccluded.

The interlocking fastening strips may comprise "arrowhead-type" or "rib and groove" fastening strips as

25 shown in Fig. 7 and as described in U.S. Patent 3,806,998. The rib element 505 interlocks with the groove element 507. The rib element 505 is of generally arrow-shape in transverse cross section including a head 510 comprising interlock shoulder hook portions 511 and 512 generally convergently

30 related to provide a cam ridge 513 generally aligned with a stem flange 514 by which the head is connected in spaced relation with respect to the supporting flange portion 508. (U.S. Patent 3,806,998, Col. 2, lines 16-23). At their

surfaces nearest the connecting stem flange 514, the shoulder portions 511 and 512 define reentrant angles therewith providing interlock hooks engageable with interlock hook flanges 515 and 517 respectively of the groove element 507. (U.S. Patent 3,806,998, Col. 2, lines 23-28). Said hook flanges generally converge toward one another and are spread open to receive the head 510 therebetween when said head is pressed into said groove element 507 until the head is fully received in a groove 518 of said groove element 507 generally complementary to the head and within which the head is interlocked by interengagement of the head shoulder hook portions 511 and 512 and the groove hook flanges 515 and 517. (U.S. Patent 3,806,998, Col. 2, lines 28-36). Through this arrangement, as indicated, the head and groove elements 505 and 507 are adapted to be interlockingly engaged by being pressed together and to be separated when forcibly pulled apart, as by means of a generally U-shaped slider 519. (U.S. Patent 3,806,998, Col. 2, lines 36-41).

The slider 519 includes a flat back plate 520 adapted to run along free edges 521 on the upper ends of the sections of the flange portions 508 and 509 as shown in the drawing. (U.S. Patent 3,806,998, Col. 2, lines 41-46). Integrally formed with the back plate 520 and extending in the same direction (downwardly as shown) therefrom are respective coextensive side walls 522 with an intermediate spreader finger 523 extending in the same direction as the side walls at one end of the slider. (U.S. Patent 3,806,998, Col. 2, lines 46-51). The side walls 522 are in the form of panels which are laterally divergent from a narrower end of the slider. (U.S. Patent 3,806,998, Col. 2, lines 51-55). The slider walls 522 are each provided with an inwardly projecting shoulder structure 524 flange adapted to engage

respective shoulder ribs 525 and 527 on respectively outer sides of the lower section of the flange portions 508 and 509. (U.S. Patent 3,806,998, Col. 2, line 66 to Co. 3, line 3).

5

Additionally, the interlocking fastening strips may comprise "profile" fastening strips, as shown in Fig. 8 and described in U.S. Patent 5,664,299. As shown in FIG. 8, the first profile 616 has at least an uppermost closure element 10 616a and a bottommost closure element 616b. (U.S. Patent 5,664,299, Col. 3, lines 25-27). The closure elements 616a and 616b project laterally from the inner surface of strip 614. (U.S. Patent 5,664,299, Col. 3, lines 27-28). Likewise, the second profile 617 has at least an uppermost 15 closure element 617a and a bottommost closure element 617b. (U.S. Patent 5,664,299, Col. 3, lines 28-30). The closure elements 617a and 617b project laterally from the inner surface of strip 615. (U.S. Patent 5,664,299, Col. 3, lines 30-32). When the bag is closed, the closure elements of 20 profile 616 interlock with the corresponding closure elements of profile 617. (U.S. Patent 5,664,299, Col. 3, lines 32-34). As shown in FIG. 8, closure elements 616a, 616b, 617a and 617b have hooks on the ends of the closure elements, so that the profiles remain interlocked when the bag is closed, 25 thereby forming a seal. (U.S. Patent 5,664,299, Col. 3, lines 34-37).

The straddling slider 610 comprises an inverted U-shaped member having a top 620 for moving along the top edges 30 of the strips 614 and 615. (U.S. Patent 5,664,299, Col. 4, lines 1-3). The slider 610 has side walls 621 and 622 depending from the top 620. (U.S. Patent 5,664,299, Col. 4, lines 3-4). A separating leg 623 depends from the top 620

between the side walls 621 and 622 and is located between the uppermost closure elements 616a and 617a of profiles 616 and 617. (U.S. Patent 5,664,299, Col. 4, lines 26-30). The fastening assembly includes ridges 625 on the outer surfaces
5 of the fastening strips 614 and 615, and shoulders 621b and 622b on the side walls of the slider. (U.S. Patent 5,664,299, Col. 4, lines 62-65). The shoulders act as means for maintaining the slider in straddling relation with the fastening strips by grasping the lower surfaces of the ridges
10 625. (U.S. Patent 5,664,299, Col. 5, lines 4-7).

Also, the interlocking fastening strips may be "rolling action" fastening strips as shown in Fig. 9 and described in U.S. Patent 5,007,143. The strips 714 and 715 include
15 profiled tracks 718 and 719 extending along the length thereof parallel to the rib and groove elements 716 and 717 and the rib and groove elements 716, 717 have complimentary cross-sectional shapes such that they are closed by pressing the bottom of the elements together first and then rolling
20 the elements to a closed position toward the top thereof. (U.S. Patent 5,007,143, Col. 4, line 62 to Col. 5, line 1). The rib element 716 is hook shaped and projects from the inner face of strip 714. (U.S. Patent 5,007,143, Col. 5, lines 1-3). The groove element 717 includes a lower hook-
25 shaped projection 717a and a relatively straight projection 717b which extend from the inner face of strip 715. (U.S. Patent 5,007,143, Col. 5, lines 3-6). The profiled tracks 718 and 719 are inclined inwardly toward each other from their respective strips 714 and 715. (U.S. Patent 5,007,143,
30 Col. 5, lines 6-8).

The straddling slider 710 comprises an inverted U-shaped plastic member having a back 720 for moving along the

top edges of the tracks 718 and 719 with side walls 721 and 722 depending therefrom for cooperating with the tracks and extending from an opening end of the slider to a closing end. (U.S. Patent 5,007,143, Col. 5, lines 26-31). A separator
5 finger 723 depends from the back 720 between the side walls 721 and 722 and is inserted between the inclined tracks 718 and 719. (U.S. Patent 5,007,143, Col. 5, lines 34-36). The slider 710 has shoulders 721a and 722a projecting inwardly from the depending side walls 721 and 722 which are shaped
10 throughout the length thereof for cooperation with the depending separator finger 723 in creating the rolling action in opening and closing the reclosable interlocking rib and groove profile elements 716 and 717. (U.S. Patent 5,007,143, Col. 5, lines 43-49).

15

Although several interlocking fastening strip embodiments have been specifically described and illustrated herein, it will be readily appreciated by those skilled in the art that other kinds, types, or forms of fastening
20 strips may alternatively be used without departing from the scope or spirit of the present invention.

The interlocking fastening strips may be manufactured by extrusion through a die. The interlocking fastening
25 strips may be formed from any suitable thermoplastic material including, for example, polyethylene, polypropylene, nylon, or the like, or from a combination thereof. Thus, resins or mixtures of resins such as high density polyethylene, medium density polyethylene, and low density polyethylene may be
30 employed to prepare the interlocking fastening strips. For example, the fastening strips may be made from low density polyethylene.

When the fastening strips are used in a sealable bag, the fastening strips and the films that form the body of the bag may be conveniently manufactured from heat sealable material. In this way, the bag may be economically formed by
5 using an aforementioned thermoplastic material and by heat sealing the fastening strips to the bag. For example, the bag may be made from a mixture of high pressure, low density polyethylene and linear, low density polyethylene.

10 The fastening strips may be manufactured by extrusion or other known methods. For example, the closure device may be manufactured as individual fastening strips for later attachment to the bag or may be manufactured integrally with the bag. In addition, the fastening strips may be
15 manufactured with or without flange portions on one or both of the fastening strips depending upon the intended use of the fastening strips or expected additional manufacturing operations.

20 The fastening strips can be manufactured in a variety of forms to suit the intended use. The fastening strips may be integrally formed on the opposing sidewalls of the container or bag, or connected to the container by the use of any of many known methods. For example, a thermoelectric
25 device may be applied to a film in contact with the flange portion of the fastening strips or the thermoelectric device may be applied to a film in contact with the base portion of fastening strips having no flange portion, to cause a transfer of heat through the film to produce melting at the
30 interface of the film and a flange portion or base portion of the fastening strips. Suitable thermoelectric devices include heated rotary discs, traveling heater bands, resistance-heated slide wires, and the like. The connection

between the film and the fastening strips may also be established by the use of hot melt adhesives, hot jets of air to the interface, ultrasonic heating, or other known methods. The bonding of the fastening strips to the film stock may be carried out either before or after the film is U-folded to form the bag. In any event, such bonding may be done prior to side sealing the bag at the edges by conventional thermal cutting. In addition, the first and second fastening strips may be positioned on opposite sides of the film. Such an embodiment would be suited for wrapping an object or a collection of objects such as wires. The first and second fastening strips should usually be positioned on the film in a generally parallel relationship with respect to each other, although this will depend on the intended use.

The slider may be multiple parts and snapped together. In addition, the slider may be made from multiple parts and fused or welded together. The slider may also be a one piece construction. The slider can be colored, opaque, translucent or transparent. The slider may be injection molded or made by any other method. The slider may be molded from any suitable plastic material, such as, nylon, polypropylene, polystyrene, acetal, toughened acetal, polyketone, polybutylene terephthalate, high density polyethylene, polycarbonate or ABS (acrylonitrile-butadiene-styrene).

From the foregoing it will be understood that modifications and variations may be effectuated to the disclosed structures - particularly in light of the foregoing teachings - without departing from the scope or spirit of the present invention. As such, no limitation with respect to the specific embodiments described and illustrated herein is intended or should be inferred. In addition, all references

and copending applications cited herein are hereby
incorporated by reference in their entireties.

WHAT IS CLAIMED IS:

1. A container comprising:
 - 5 a first sidewall and a second sidewall, said first sidewall includes a first fastening strip, said second sidewall includes a second fastening strip;
a first side seal to be disposed along a first edge of said first and second sidewalls for joining said sidewalls
10 at said first edge;
a second side seal to be disposed along a second edge of said first and second sidewalls for joining said sidewalls at said second edge;
a third side seal to be disposed along said first side
15 seal.
2. The invention as in claim 1 wherein the container includes a slider adapted to be slidably disposed on said fastening strips and facilitating the occlusion of said
20 fastening strips when moved towards a first end thereof and facilitating the deocclusion of said fastening strips when moved towards a second end thereof.
3. The invention as in claim 1 having a longitudinal X
25 axis and a transverse Y axis, said transverse Y axis being perpendicular to said longitudinal X axis, said container having a vertical Z axis, said vertical Z axis being perpendicular to said longitudinal X axis, said vertical Z axis being perpendicular to said transverse Y axis, said
30 first and third side seals disposed parallel to said vertical Z axis.

4. The invention as in claim 1 wherein the container includes a fourth side seal to be disposed along said second side seal.

5 5. The invention as in claim 1 wherein the container includes a fifth side seal to be disposed along said first and third side seals.

6. The invention as in claim 4 wherein the container
10 includes a fifth side seal to be disposed along said first and third side seals and a sixth side seal to be disposed along said second and fourth side seals.

7. The invention as in claim 1 wherein a gap is
15 positioned between the first side seal and the third side seal.

8. The invention as in claim 4 wherein a first gap is positioned between the first side seal and the third side
20 seal and a second gap is positioned between the second side seal and the fourth side seal.

9. The invention as in claim 1 wherein said side seals are manufactured by heat sealing.
25

10. The invention as in claim 1 wherein said side seals are manufactured by ultrasonic sealing.

11. The invention as in claim 1 wherein said side
30 seals are manufactured using adhesives that attach the sidewalls together.

12. The invention as in claim 1 wherein said fastening strips comprise U-channel type fastening strips.

13. The invention as in claim 1 wherein said fastening
5 strips comprise arrowhead type fastening strips.

14. The invention as in claim 1 wherein said fastening strips comprise profile type fastening strips.

10 15. The invention as in claim 1 wherein said fastening strips comprise rolling action type fastening strips.

16. A method of manufacturing a container comprising:
providing a first sidewall and a second sidewall, said
15 first sidewall includes a first fastening strip, said second
sidewall includes a second fastening strip;

providing a first side seal to be disposed along a
first edge of said first and second sidewalls for joining
said sidewalls at said first edge;

20 providing a second side seal to be disposed along a
second edge of said first and second sidewalls for joining
said sidewalls at said second edge;

providing a third side seal to be disposed along said
first side seal.

25

17. The invention as in claim 16 wherein the container
includes a slider adapted to be slidably disposed on said
fastening strips and facilitating the occlusion of said
fastening strips when moved towards a first end thereof and
30 facilitating the deocclusion of said fastening strips when
moved towards a second end thereof.

18. The invention as in claim 17 having a longitudinal X axis and a transverse Y axis, said transverse Y axis being perpendicular to said longitudinal X axis, said container having a vertical Z axis, said vertical Z axis being
5 perpendicular to said longitudinal X axis, said vertical Z axis being perpendicular to said transverse Y axis, said first and third side seals disposed parallel to said vertical Z axis.

10 19. The invention as in claim 16 wherein the container includes a fourth side seal to be disposed along said second side seal.

20 20. The invention as in claim 16 wherein the container includes a fifth side seal to be disposed along said first and third side seals.


21. The invention as in claim 19 wherein the container includes a fifth side seal to be disposed along said first and third side seals and a sixth side seal to be disposed
20 along said second and fourth side seals.

22. The invention as in claim 16 wherein a gap is positioned between the first side seal and the third side
25 seal.

23. The invention as in claim 19 wherein a first gap is positioned between the first side seal and the third side seal and a second gap is positioned between the second side
30 seal and the fourth side seal.

24. The invention as in claim 16 wherein said side seals are manufactured by heat sealing.

1/8

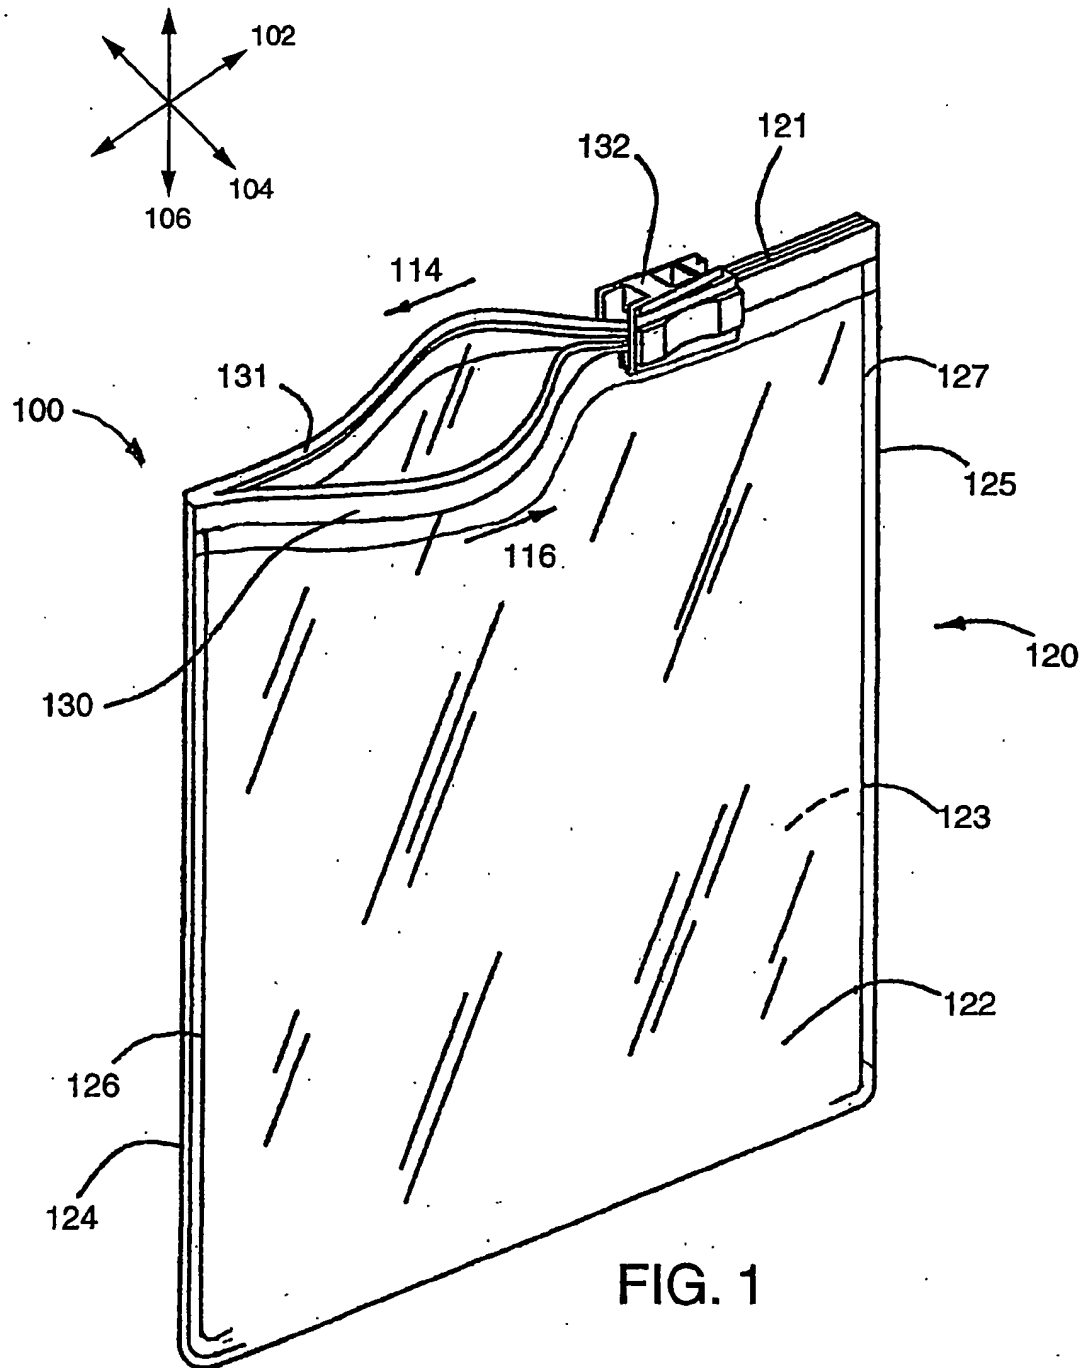

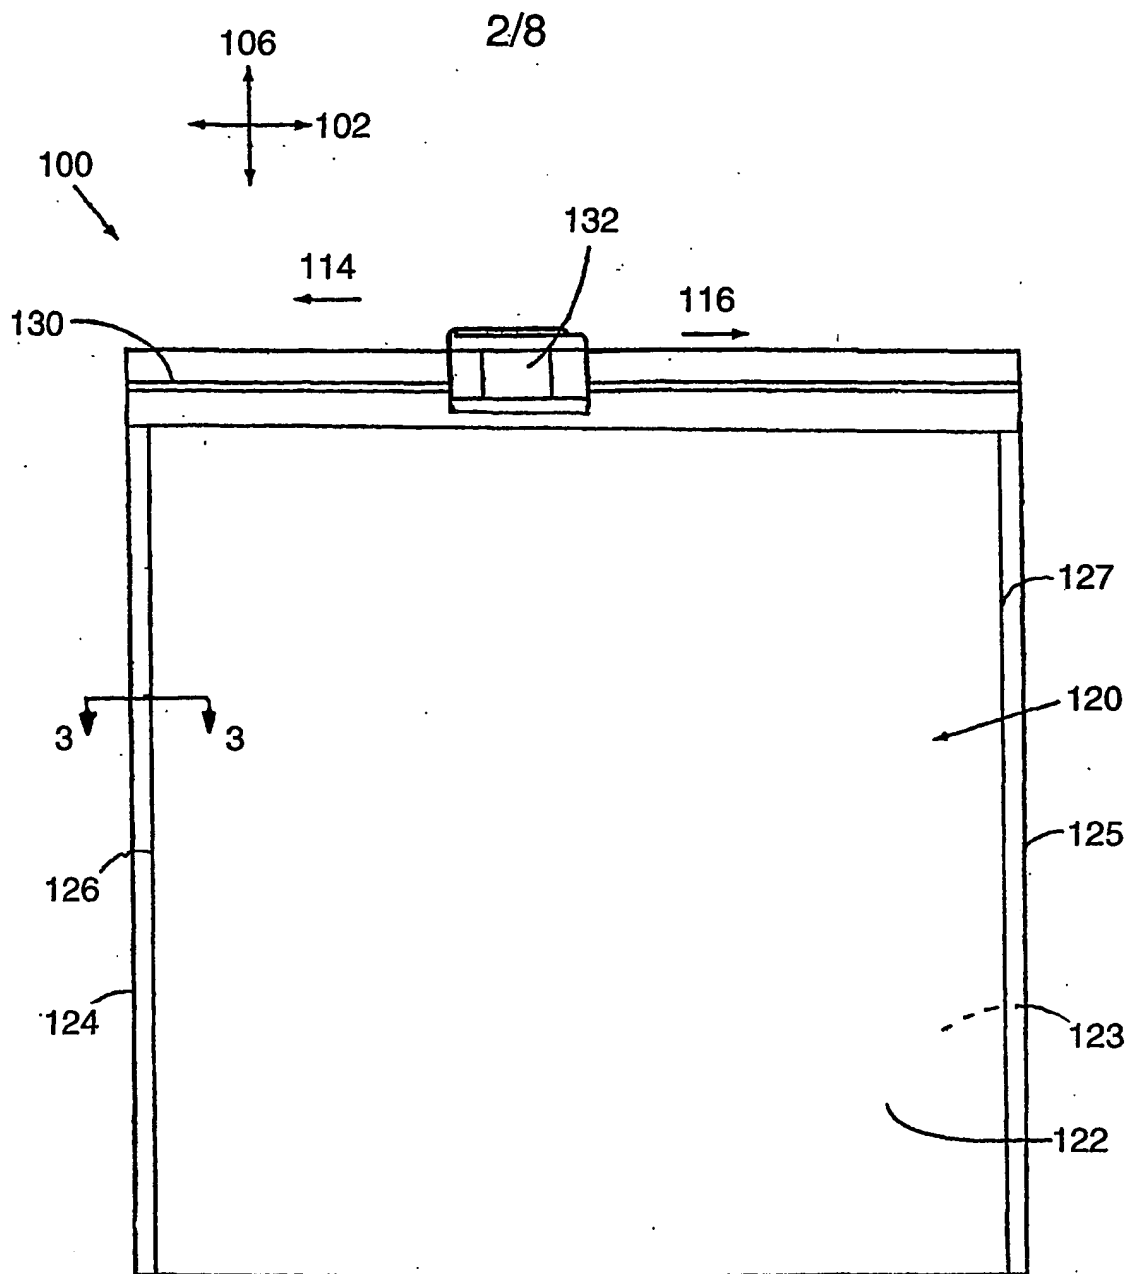


FIG. 2

3/8

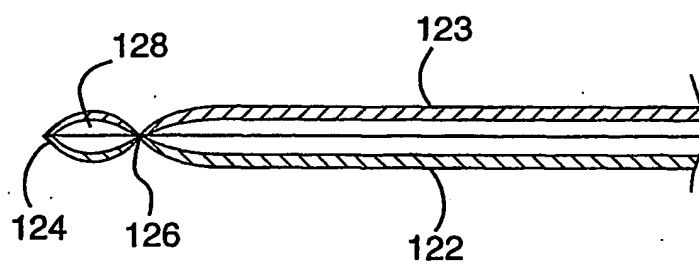



FIG. 3

4/8

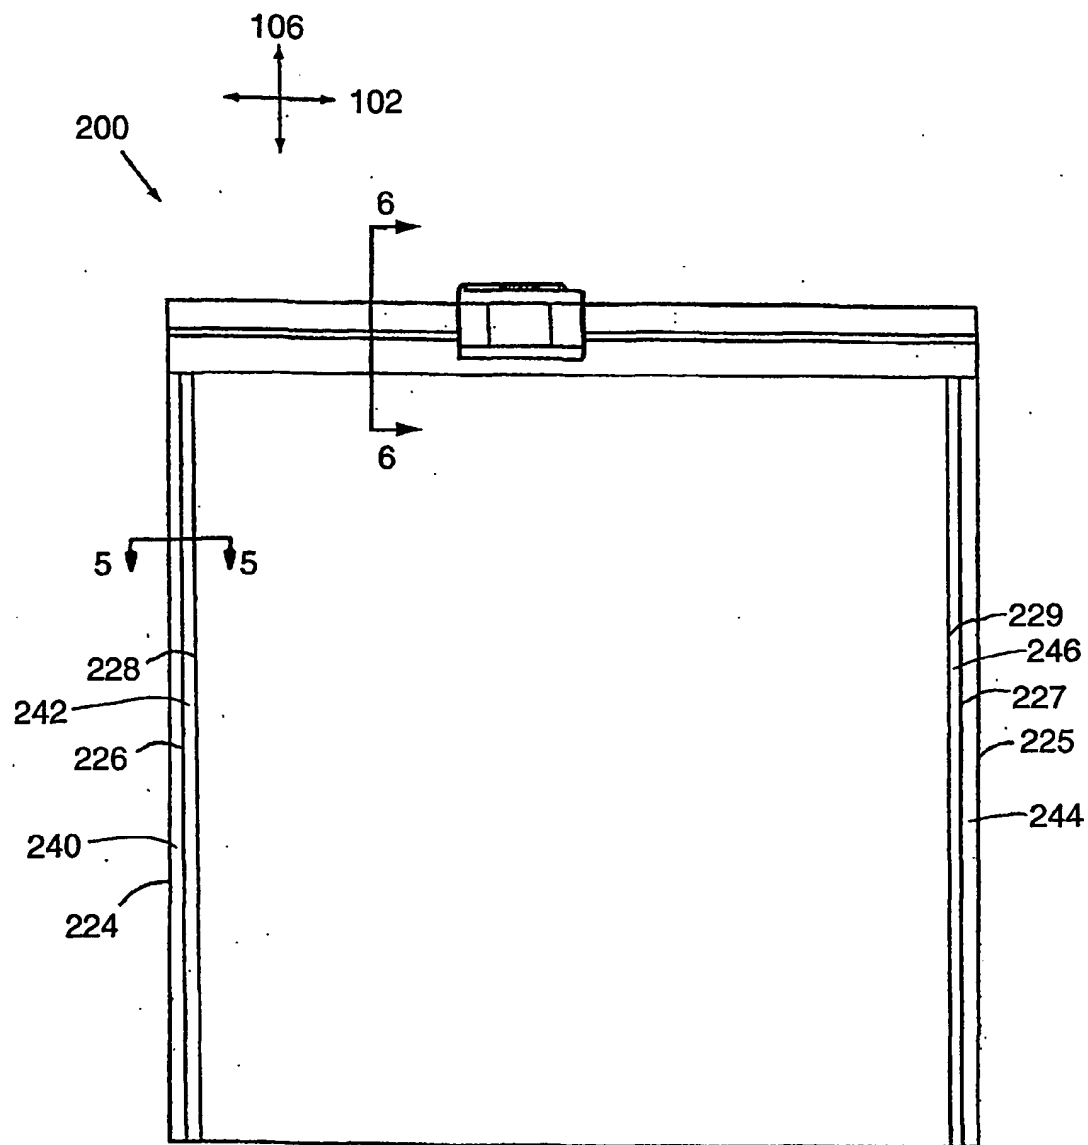


FIG. 4

5/8

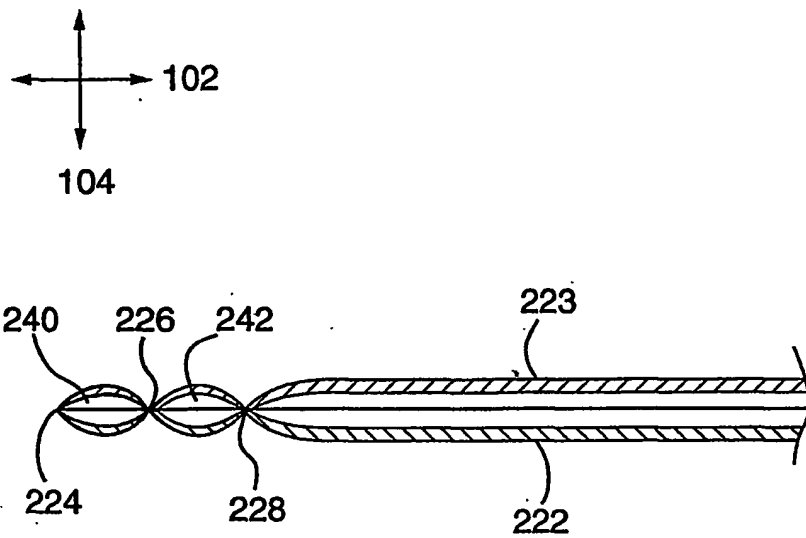
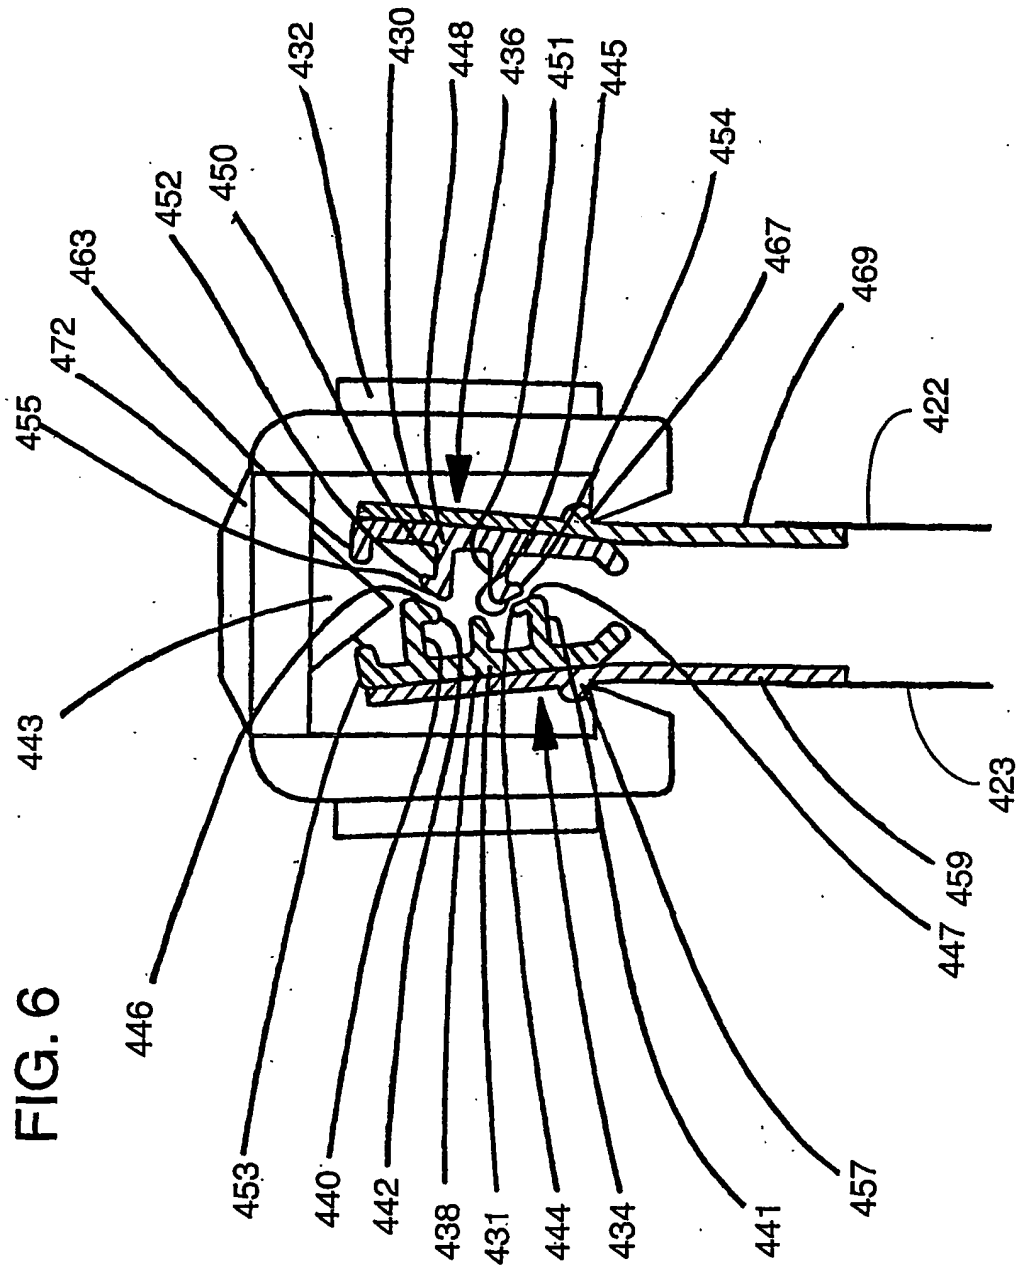
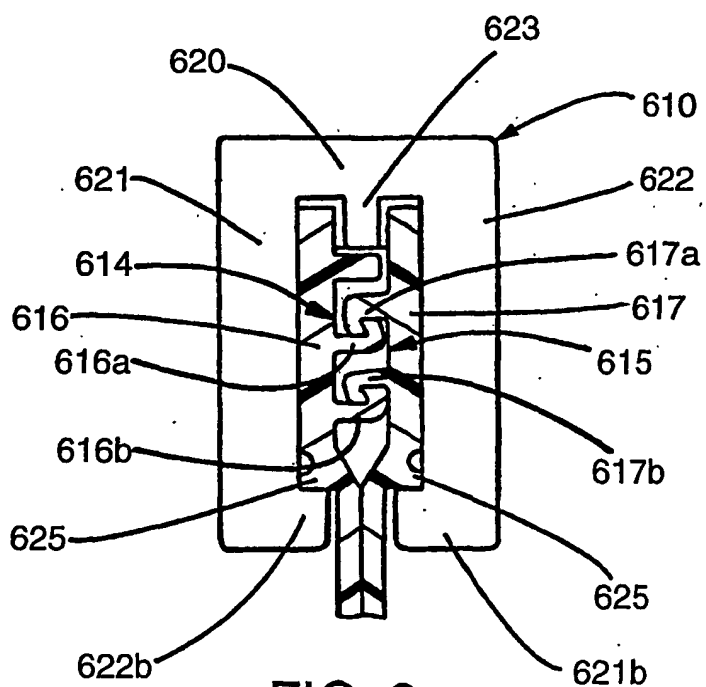
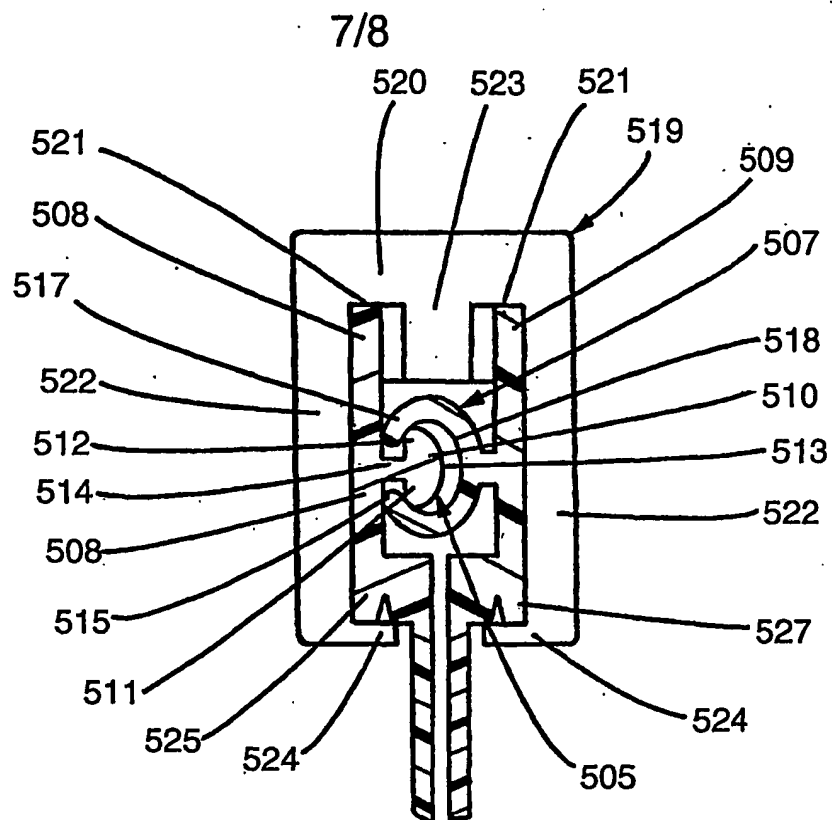


FIG. 5

6/8





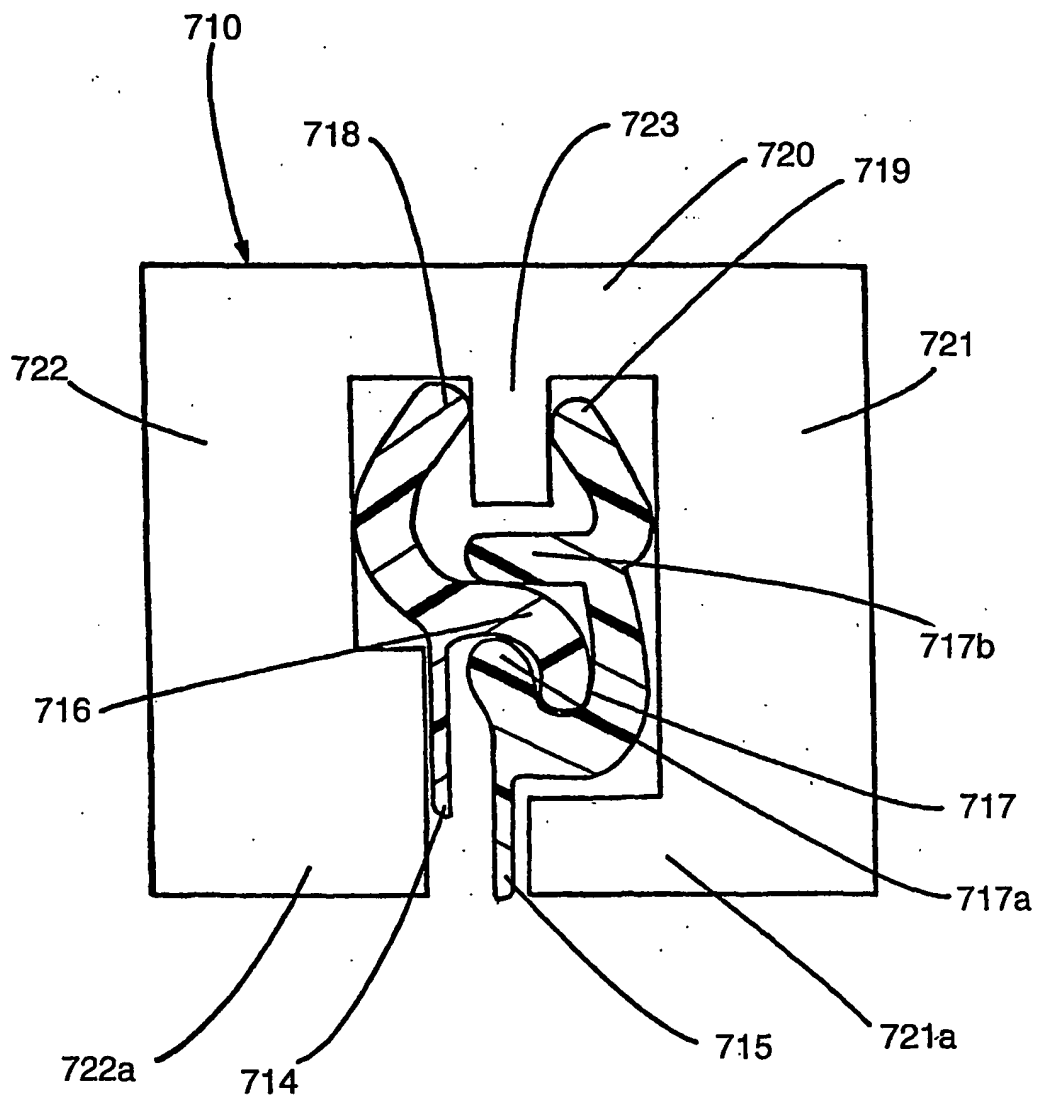


FIG. 9.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/40121

A. CLASSIFICATION OF SUBJECT MATTER														
IPC(7) :B65D 33/16, B31B 1/90 US CL :383/64; 493/214 According to International Patent Classification (IPC) or to both national classification and IPC														
B. FIELDS SEARCHED														
Minimum documentation searched (classification system followed by classification symbols) U.S. : 383/64,63,65,107,903; 24/587; 53/139.2; 493/214,927														
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched														
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)														
C. DOCUMENTS CONSIDERED TO BE RELEVANT														
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.												
Y	US 4,750,846 A (MYCLEBUST et al) 14 JUNE 1988, see entire document.	1-30												
Y	US 5,664,299 ¹ POURCHIA et al) 09 SEPTEMBER 1997, see entire document.	1-8,14,16-23,29												
Y	US 5,007,143 A (HERRINGTON) 16 APRIL 1991, see entire document.	1-11,15-26,30												
Y	US 4,829,641 A (WILLIAMS) 16 MAY 1989, see entire document.	9-11,24-26												
A		-----12,27												
Y	US 5,871,281 A (STOLMEIER et al) 16 FEBRUARY 1999, see entire document.	1-11,13,16-26,28												
Y	US 5,947,603 A (TILMAN) 07 SEPTEMBER 1999, see entire	1-12,16-27												
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.														
<table border="0"> <tr> <td>* Special categories of cited documents:</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"E" earlier document published on or after the international filing date</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"&" document member of the same patent family</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td></td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family	"O" document referring to an oral disclosure, use, exhibition or other means		"P" document published prior to the international filing date but later than the priority date claimed	
* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention													
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone													
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art													
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family													
"O" document referring to an oral disclosure, use, exhibition or other means														
"P" document published prior to the international filing date but later than the priority date claimed														
Date of the actual completion of the international search 20 SEPTEMBER 2000		Date of mailing of the international search report 10 OCT 2000												
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer ROBIN A. HYLTON Telephone No. (703) 308-1208 <i>Sheila Veney</i> <i>Paralegal Specialist</i> <i>Technology Center 3700</i>												

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/40121

C (Continuation): DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,944,425 A (FORMAN) 31 AUGUST 1999, see figure 2.	13,28
A	US 3,806,998 A (LAGUERRE) 30 APRIL 1974, see entire document.	13,28